
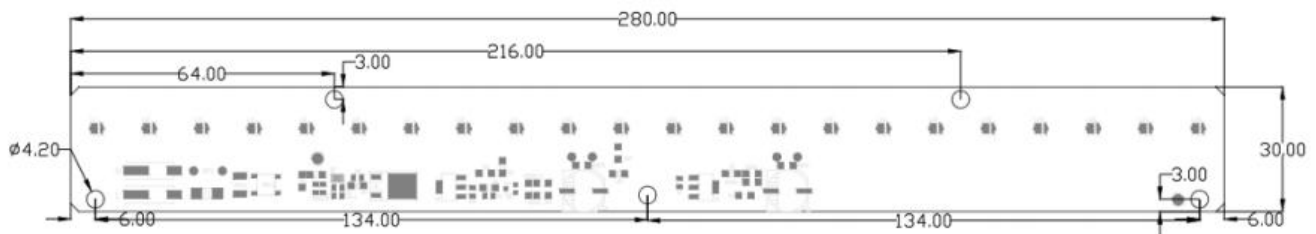


- AC 120V input directly
- EMI compliance
- THDI<15%
- Surge protection: 2.5KV
- High-pot level: 1.5KV
- CRI: 80/90 options
- Low flicker<28% (Title 24)

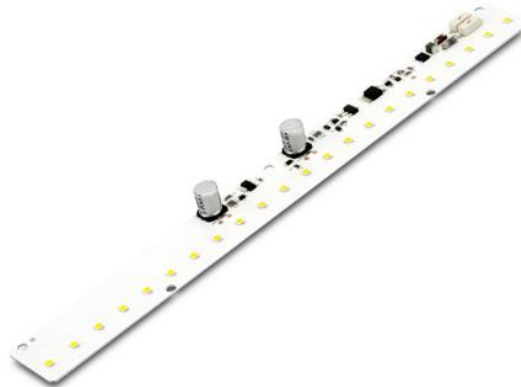

General information

P/N	Power	Voltage	PF	Efficiency	CRI	CCT	THD	Dimension
	W	V	-	Lm/w	Ra	K	%	mm
RL-LM280x30A2201H009-827FB	9	120	0.95	90	80	2700	<10	280*30
RL-LM280x30A2201H009-830FB	9	120	0.95	95	80	3000	<10	280*30
RL-LM280x30A2201H009-840FB	9	120	0.95	100	80	4000	<10	280*30
RL-LM280x30A2201H009-850FB	9	120	0.95	100	80	5000	<10	280*30
RL-LM280x30A2201H009-857FB	9	120	0.95	100	80	5700	<10	280*30

RL-LM280x30A2201H016-827FB	16	120	0.95	80	80	2700	<10	280*30
RL-LM280x30A2201H016-830FB	16	120	0.95	85	80	3000	<10	280*30
RL-LM280x30A2201H016-840FB	16	120	0.95	90	80	4000	<10	280*30
RL-LM280x30A2201H016-850FB	16	120	0.95	90	80	5000	<10	280*30
RL-LM280x30A2201H016-857FB	16	120	0.95	90	80	5700	<10	280*30

Note:

1. Various CCT available (2700-6500K); CRI70/80/90
2. Typical optical-electronic parameters above