

# DC LED Modules

Ultra high efficiency led light-bar



## Linear Series




- ◆ High efficiency up to 200lm/W
- ◆ Poke in wiring connectors
- ◆ Within 3-step Macadam
- ◆ Various CCT available
- ◆ Optional 80 & 90 & 95 CRI

P/N	Size	Voltage -Vdc		Current -mA		Power -W		Flux	Efficiency	CCT	CRI
	mm	Typ	Max	Typ	Max	Typ	Max	Lm ( Max )	Lm/W	K	-
RL-CM70x24A0109H001-840	70*24	2.9	3.3	500	1350	1.5	4.5	650	150-200	4000	80
RL-CM140x24A0209H003-840	140*24	5.8	6.6	500	1350	2.9	9	1300	150-200	4000	80
RL-CM280x24A0409H006-840	280*24	11.6	13.2	500	1350	5.8	18	2600	150-200	4000	80
RL-CM560x24A0809H012-840	560*24	23.2	26.4	500	1350	11.6	36	5200	150-200	4000	80

**Note:** 1-Variou CCT available ( 2700-6000K ) ; RL-XXXXXXXXXXXXXXXX-840 ( 8-80CRI;40-4000K CCT )

2-Typical Optical-electronic parameters above @ Ta=25°C

### Application

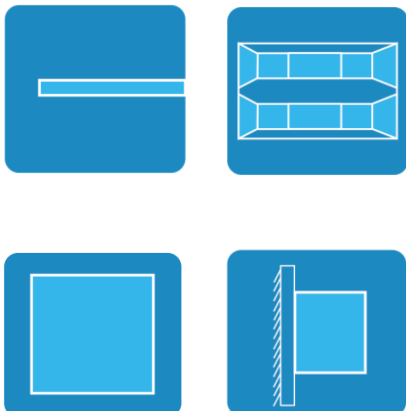

### Dimension --mm

