


AC LED Modules

Driverless led engine solution-Full balance



Round Series

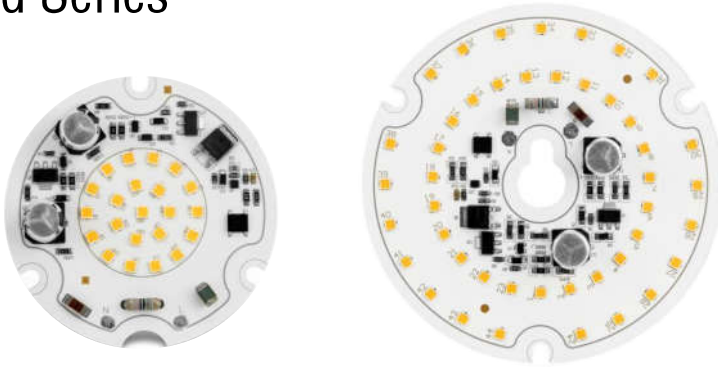

- ◆ AC input directly
- ◆ EMI compliance
- ◆ THDI<15%
- ◆ Surge protection : 2.5KV
- ◆ High-pot level : 1.5KV
- ◆ Flicker(120V input) <28%

P/N	Size mm	Input Vac	Power W	PF -	Flux Lm	Efficiency Lm/W	CCT K	CRI -	Dimming -
RL-HMD70A2801H016-840TB	Ø70	230	16	0.95	1680	105	4000	80	TRIAC
RL-HMD100A2802H016-840TB	Ø100	230	16	0.95	1840	115	4000	80	TRIAC
RL-HMD180A2802H023-840TB	Ø180	230	23	0.95	2400	105	4000	80	TRIAC
RL-LMD70A2201N016-930FB	Ø70	120	16	0.95	1360	85	3000	90	TRIAC
RL-LMD100A2202N016-930FB	Ø100	120	16	0.95	1440	90	3000	90	TRIAC
RL-LMD180A2202N023-930FB	Ø180	120	23	0.95	1955	85	3000	90	TRIAC

Application



Downlight



Ceiling Light



Pendant Light



Wall Light

Dimension --mm

