

## 27x21 LED Wall Washer Strip Data Sheet

Top Bend



- 2721 fully covered rubber wall washing lamp, the bending radius is 150mm, the product can be cut freely. Good heat dissipation, durable.
- Multi-angle selection. 15°, 30°, 60°, 25x35°, 30P10°
- good wall washing effect, high irradiation intensity, uniform light, no color difference,
- Monochrome, two-color, RGB, RGBW, SPI, DMX program series is complete
- Waterproof grade IP67 • 3 years warranty


### Technologies

- ON/OFF, Dali, PWM, 0-10V, DMX2PWM  
Dimmer, Radio Frequency control


### Application

- This product is suitable for engineering projects, outdoor lighting, buildings, hotels, shopping malls, and other decorative lighting purposes.


### Color Options




### Dimensions

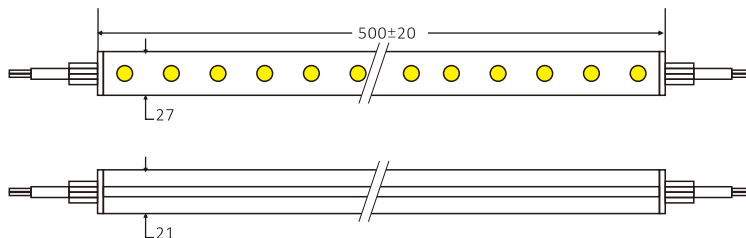


### Beam Angle

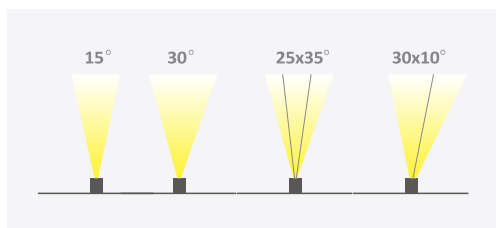


### Sectional drawing



### Recommended Accessories



Bracket



Alu Profile



PC Cocer with Profile



Bendable Profile

## Product Specifications

P/N	LED Quantity	CCT K	CRI	LED (SM)	LUMENS (lm/m)	Vf. (V.)	Current (mA/M)	Power (W/M)	Cut Length (MM)	Max Run (M)
RL-FV2416024283520-830-FWD2721	2835	2700	80/90	24	1600	24	833	20	41.67	5
		3000			1600					
		4000			1700					
		6500			1700					

## Other Specifications

Protection grade	IP67
Working temperature (°C)	-25~+60
Standard length (°C)	-25~+70
Maximum cascade length(m)	5
Maximum cascade length (m)	5
weight	/

## Remark

- The test environment temperature is 25±2°C;
- The above data are typical values, the actual parameters of the product may be different from the typical data; the data is subject to change without notice;
- The above "/" means that this parameter is not required for the time being.


## Applied Standards



## Installation





Note :Due to the different types and attributes of neon lights, please refer to the, line marks for the bending radius

### Bending Direction & Min. radius

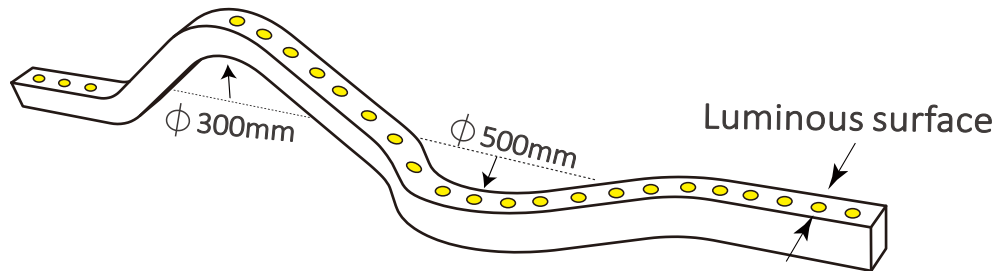


## Mounting with aluminium profiles

Install with the screws provided. Do not use screws of other types or sizes that do not meet requirements.

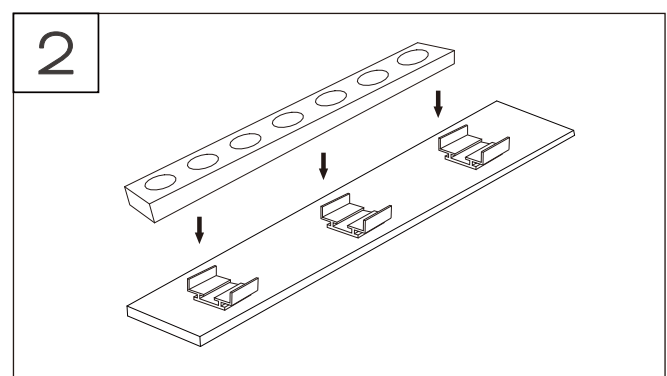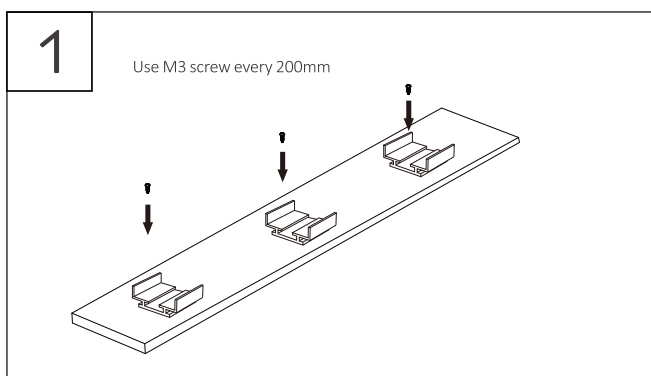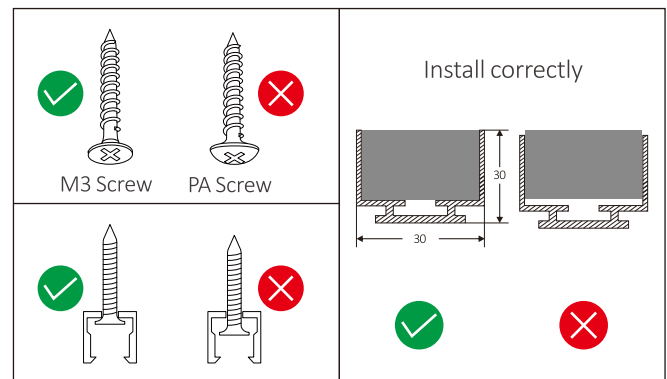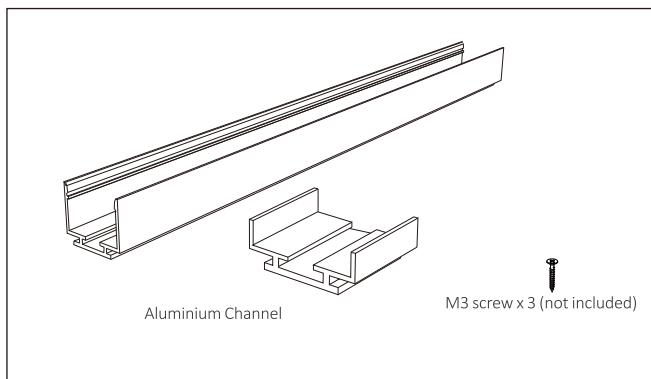


## Schematic diagram of electrical connection

Monochrome temperature wiring diagram 1: Power + lamp belt connection mode

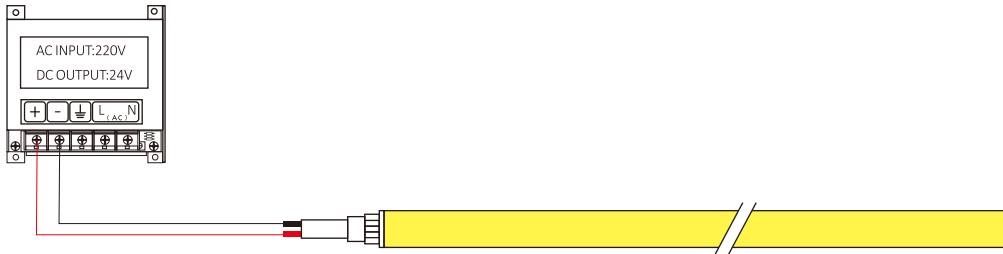

## Package

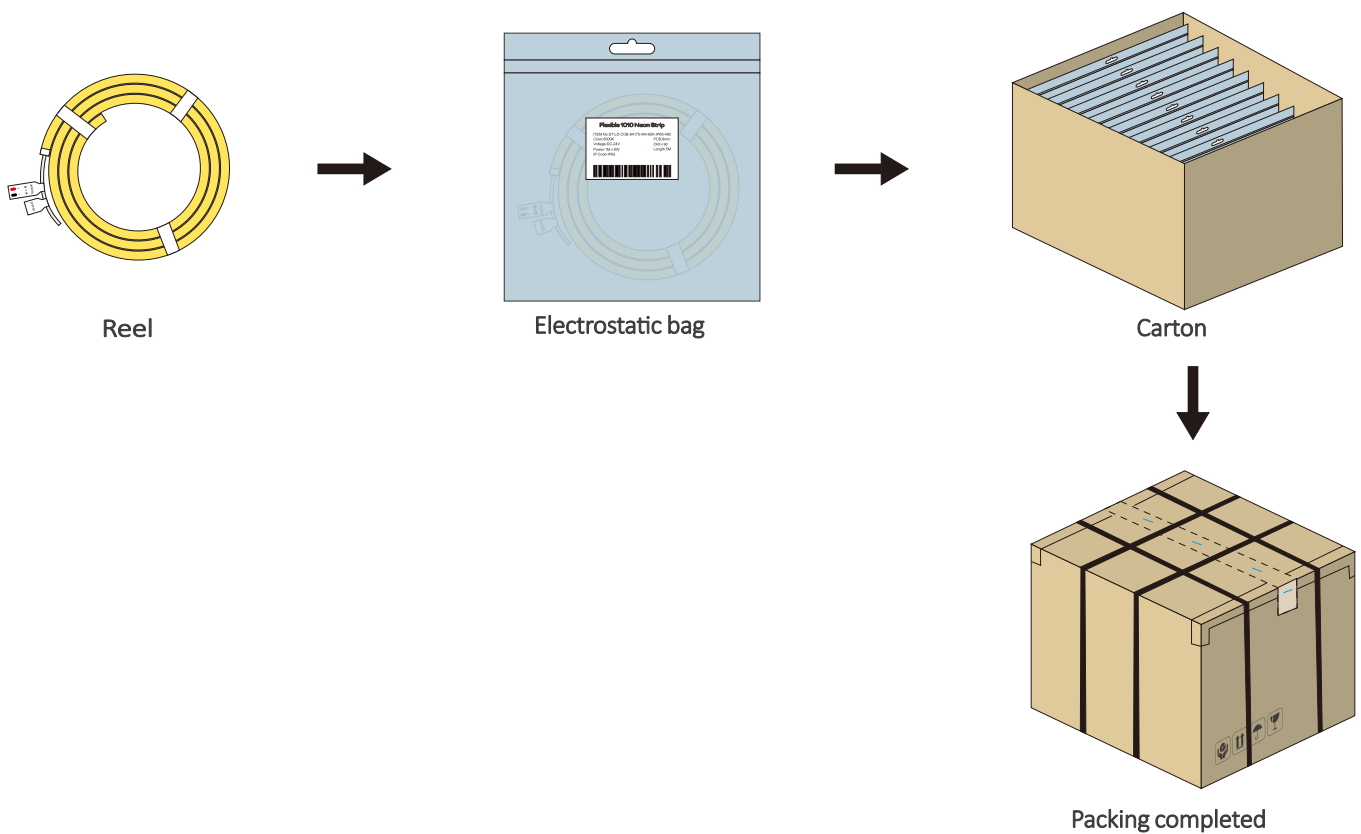

**Note :** The above-mentioned packaging quantity and weight are only for the packaging method shown in the figure. There will be differences in the number and weight of packaging for other packaging methods, and the actual product shall prevail.



Specialized  
LED Strip Manufacturer

Shenzhen  
Relight Technology Co.,Ltd

6th Floor, Building A, Guancheng Industrial Park, Gongming Town,  
Guangming District, Shenzhen, China

Tel: 86 0755 3369 1713  
Web: [www.relight-tech.com](http://www.relight-tech.com)  
E-mail: [Sales@relight-tech.com](mailto:Sales@relight-tech.com)